




Features/Benefits

- **Low cost**
- **Momentary and maintained models**
- **PC and quick connect terminals**
- **Recessed bracket available—prevents accidental actuation**

Typical Applications

- **Computers**
- **Vacuum cleaners**
- **Coffee makers**

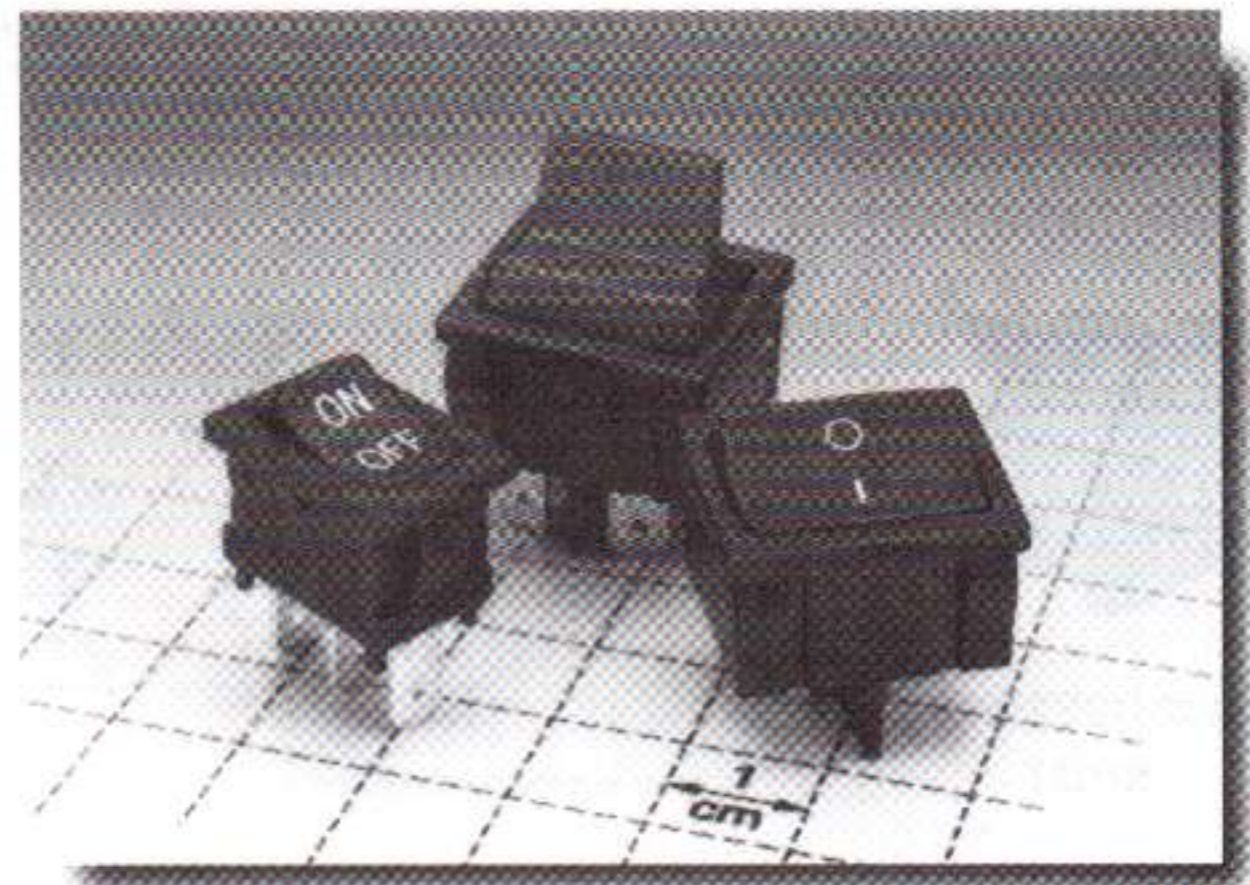

Build-A-Switch

Our easy Build-A-Switch concept allows you to mix and match options to create the switch you need. Below is a complete listing of options shown in catalog. To order, simply select desired option from each category and place in the appropriate box. Switches with standard options are shown on page F-50. Available options are shown and described on pages F-50 thru F-52. For additional options not shown in catalog, consult Customer Service Center.

Typical Example: D 1 0 1 — J 1 — 2 — S 2 — 1 5 — — Q A

Switch Function

- D101** (STD.) SPDT, On-None-On
- D201** (STD.) DPDT, On-None-On
- D501** (STD.) SPDT, On-None-On
- D601** (STD.) DPDT, On-None-On
- D102** SPST, On-None-Off
- D103** SPDT, On-Off-On
- D105** SPDT, Mom.-Off-Mom.
- D108** SPDT, Mom.-None-On
- D202** DPST, On-None-Off
- D203** DPDT, On-Off-On
- D208** DPDT, Mom.-None-On
- D502** SPST, On-None-Off
- D503** SPDT, On-Off-On
- D508** SPDT, Mom.-None-On
- D602** DPST, On-None-Off
- D603** DPDT, On-Off-On
- D608** DPDT, Mom.-None-On

Actuator

- J1** (STD.) Rocker
- J5** Lever

Actuator Color

- 2** (STD.) Black
- 1** White
- 3** Red
- T** Beige

Mounting Style/Color

- S2** (STD.) Snap-in, black
- B2** Recessed snap-in bracket, black
- S1** Snap-in, white
- S3** Snap-in, red
- ST** Snap-in, beige

Terminations

- 15** (STD.) Quick connect
- A** Right angle, PC thru-hole
- 02** PC Thru-hole
- 05** Twisted quick connect
- 06** Extended PC thru-hole
- 17** Wirable quick connect

Actuator Markings

- NONE** (STD.) No marking
- D** ON-OFF
- H** O I
- N** Large dot
- P** O -
- R** Red rectangle on end
- U** Large dot on end

Contact Material

- QA** (STD.) Silver (UL/CSA)
- QF** (STD.) Silver (UL/CSA/VDE)

Specifications

CONTACT RATING: D10X and D20X Models: 4 AMPS @ 125 V AC; 2 AMPS @ 250 V AC. D50X and D60X Models: 10 AMPS @ 125 V AC; 5 AMPS @ 250 V AC.

ELECTRICAL LIFE: 10,000 make-and-break cycles at full load.

INSULATION RESISTANCE: 10⁹ ohms min.

DIELECTRIC STRENGTH: 1,000 V RMS min. @ sea level.

NOTE: Specifications and materials listed above are for standard switches. For information on specific and custom switches, consult Customer Service Center.

Materials

ACTUATOR & HOUSING: 6/6 nylon (UL 94V-2), color black, standard; finish: matte.

MOVABLE CONTACTS: D10X and D20X Models: Copper, silver plated. D50X and D60X Models: Coin silver, silver plated.

STATIONARY CONTACTS AND TERMINALS: Copper or brass, silver plated.

CONTACT SPRING: Music wire or stainless steel.



Rocker

F